


DS-HD8634Z-689D

4.0MP HD IR WATERPROOF IP CAMERA

DOWSE®

Product Picture:		Hardware			
		SOC		Hi3516D	
		Image Sensor		1/3" Progressive Scan CMOS	
		Effective Pixels		2592(H)×1520(V)	
		Interface			
		Optical lens	Interfaces	\$ 14	
			Iris	Fixed Iris	
			Focal Length	2.8-12mm(Motorized & One Push)	
		Audio Talkback		1ch MIC external access, 3.5mm AV interface (Optional)	
		Audio Output		1ch speaker output, 3.5mm AV interface (Optional)	
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485		1*RS485 interface (Optional)	
		Alarm I/O		1ch alarm input, 1ch alarm output (Optional)	
		Micro SD		Max. 128G (Optional)	
		Product Features:		Audio&Video encoding	
		◎ 1/3" Progressive Scan CMOS ◎ 4.0 Megapixel, 15fps@2592*1520, 15fps@2048*1520, 30fps@1920*1080 ◎ 2.8-12mm(Motorized & One Push), 2pcs IR Array LED for 60M, IR ON 0Lux, 110dB TWDR ◎ Support ONVIF Profile S, FTP, RTSP, UPnP etc. ◎ Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ◎ RJ45, DC 12V, Easy-to-install bracket included ◎ Option: SD card slot, Alarm I/O, Audio I/O, RS485, POE		Video Compression	
H.265 encoding: Main Profile					
H.264 encoding: High Profile/Main Profile/Baseline					
Resolution	Main Stream			2592*1520/2048*1520/1920*1080; 1~30fps(adjustable)	
	Sub Stream			704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
Video Bitrate				30Kbps~16Mbps, Supports CBR/VBR	
OSD Settings				Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable	
Privacy Mask				4 configurable regions	
Image Orientation				Image Flip and Mirror	
Auto Image Control Functions				Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
Image Controls				Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
Others				Anti Fogging/Anti Trembling/IR Detection/IRIS/	
Audio Compression				G.711A/G.711U/G.726	
Two Way Audio				Support	
Application Scenarios:				Data transmission and storage	
Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Data storage		Video and Image	
		Recording		Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output		FTP, E-mail	
		Network protocols		TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP	
Order Type:		Wireless protocols(-W)		-----	
DS-HD8634Z-689D		ONVIF Protocols		PROFILE S	
		Remote View	PC	IE 6.0 above, Firefox, Google etc.	
			Mobile Phone	-----	
			User Access	Maximum 5 users	
Outline Dimension:		General Parameters			
		Environmental Casing		Aluminum Alloy Housing, Indoor and Outdoor Applicable	
		Installation		Ceiling Mounted & Wall Mounted, 3D adjustable	
		Operating Temperature		-10 °C ~ 50 °C	
		Operating Humidity		0% -85% RH	
		Power		DC12V ±10%(AC 24±10%)	
		POE		Support	
		Power Consumption		<12w(IR ON)	
		Dimension		L310XW100XH70mm	
		Weight		965g	

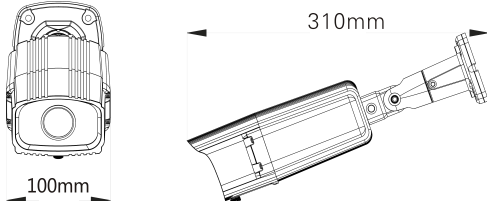

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>