


DS-HD8632M-185D
H.265 2MP IR Bullet IPC

DOWSE®

Product Picture:		Hardware		
		SOC	Hi3516D	
		Image Sensor	1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR	
		Effective Pixels	1920(H)×1080(V)	
		Interface		
		Optical lens	Interfaces	\$ 14
			Iris	Auto Iris
			Focal Length	3.6-10mm(Manual)
		Audio Talkback	1ch MIC external access, 3.5mm AV interface (Optional)	
		Audio Output	1ch speaker output, 3.5mm AV interface (Optional)	
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector
Product Features: © 1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR © 2.0 Megapixel, 30fps@1920*1080 © 3.6-10mm(Manual), 2pcs IR Array LED for 60M, IR ON 0Lux, 140dB TWDR © Support ONVIF Profile S, FTP, RTSP, UPnP etc. © Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. © RJ45, DC 12V, Easy-to-install bracket included © Option: SD card slot, Alarm I/O, Audio I/O, RS485, POE		RS485	1*RS485 interface (Optional)	
		Alarm I/O	1ch alarm input, 1ch alarm output (Optional)	
		Micro SD	Max. 128G (Optional)	
		Audio&Video encoding		
		Video Compression	H.265/H.264/MJPEG	
			H.265 encoding: Main Profile	
			H.264 encoding: High Profile/Main Profile/Baseline	
		Resolution	Main Stream	1920*1080/1280*720; 1~30fps(adjustable)
			Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)
		Video Bitrate	30Kbps~16Mbps, Supports CBR/VBR	
OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable			
Privacy Mask	4 configurable regions			
Image Orientation	Image Flip and Mirror			
Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Blance (AWB); Auto Gain Control(AGC)			
Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR			
Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/			
Audio Compression	G.711A/G.711U/G.726			
Two Way Audio	Support			
Application Scenarios:		Data transmission and storage		
Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Data storage	Video and Image	
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output	FTP, E-mail	
		Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP	
Order Type:	Wireless protocols(-W)	-----		
DS-HD8632M-185D	ONVIF Protocols	PROFILE S		
	Remote View	PC	IE 6.0 above, Firefox, Google etc.	
		Mobile Phone	-----	
		User Access	Maximum 5 users	
Outline Dimension:		General Parameters		
		Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable	
		Installation	Ceiling Mounted & Wall Mounted	
		Operating Temperature	-10 °C ~ 50 °C	
		Operating Humidity	0% -85% RH	
		Power	DC12V ±10%(AC 24±10%)	
		POE	Support	
		Power Consumption	<12w(IR ON)	
		Dimension	L310XW100XH70mm	
		Weight	965g	

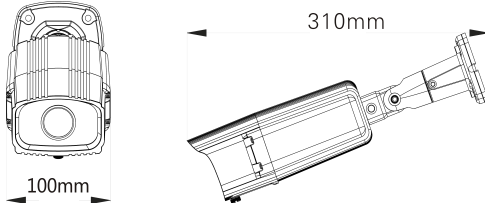

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>