


DS-HD6364ZR-689D

4.0MP HD IR DOME IP CAMERA (H.265)

DOWSE®

Product Picture:		Hardware			
		SOC		Hi3516D	
		Image Sensor		1/3" Progressive Scan CMOS	
		Effective Pixels		2592(H)×1520(V)	
		Interface			
		Optical lens	Interfaces	φ 14	
			Iris	Fixed Iris	
			Focal Length	2.8-12mm(Motorized & One Push)	
		Audio Talkback		1ch MIC external access, 3.5mm AV interface	
		Audio Output		1ch speaker output, 3.5mm AV interface	
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485		1*RS485 interface	
		Alarm I/O		2ch alarm input, 1ch alarm output	
		Micro SD		Max. 128G	
		Product Features:		Audio&Video encoding	
© 1/3" Progressive Scan CMOS © 4.0 Megapixel, 15fps@2592*1520, 15fps@2048*1520, 30fps@1920*1080 © 2.8-12mm(Motorized & One Push), 3pcs IR Array LED for 30M, IR ON 0Lux, 110dB TWDR © Support ONVIF Profile S, FTP, RTSP, UPnP etc. © Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. © Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, SD card slot(Max. 128G), RS485、RJ45, DC 12V/AC 24V, POE © Vandal-proof, IK10		Video Compression		H.265/H.264/MJPEG	
				H.265 encoding: Main Profile	
				H.264 encoding: High Profile/Main Profile/Baseline	
		Resolution	Main Stream	2592*1520/2048*1520/1920*1080; 1~30fps(adjustable)	
			Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
		Video Bitrate		30Kbps~16Mbps, Supports CBR/VBR	
		OSD Settings		Text overlay supported like title, time, date, week, bitrate and etc.	
				OSD location is adjustable	
		Privacy Mask		4 configurable regions	
		Image Orientation		Image Flip and Mirror	
		Auto Image Control Functions		Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
		Image Controls		Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
		Others		Anti Fogging/Anti Trembling/IR Detection/IRIS/	
		Audio Compression		G.711A/G.711U/G.726	
Two Way Audio		Support			
Application Scenarios:		Data transmission and storage			
Supermarket, hotel, airport, office building etc.		Data storage		Video and Image	
		Recording		Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output		FTP, E-mail	
		Network protocols		TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP	
Order Type:		Wireless protocols(-W)		-----	
DS-HD6364ZR-689D		ONVIF Protocols		PROFILE S	
		Remote View	PC	IE 6.0 above, Firefox, Google etc.	
			Mobile Phone	-----	
			User Access	Maximum 5 users	
Outline Dimension:		General Parameters			
		Environmental Casing		Aluminum Alloy Housing, Indoor Applicable	
		Installation		Ceiling Mounted & Wall Mounted	
		Operating Temperature		-10 °C ~ 50 °C	
		Operating Humidity		0% -85% RH	
		Power		DC12V ±10%(AC 24±10%)	
		POE		Support	
		Power Consumption		<3.5W, IR ON<9W	
		Dimension		Φ143xH114mm	
		Weight		655g	

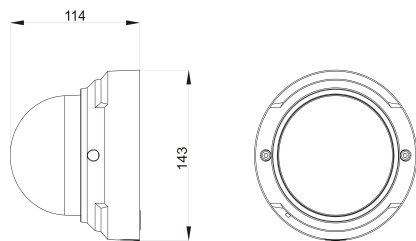

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>