


DS-HD8632Z-185D

H.265 2MP IR Bullet IPC

DOWSE®

Product Picture:		Hardware			
		SOC	Hi3516D		
		Image Sensor	1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR		
		Effective Pixels	1920(H)×1080(V)		
		Interface			
		Optical lens	Interfaces	\$ 14	
			Iris	Auto Iris	
			Focal Length	3.6-10mm(Motorized)	
		Audio Talkback	1ch MIC external access, 3.5mm AV interface (Optional)		
		Audio Output	1ch speaker output, 3.5mm AV interface (Optional)		
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485	1*RS485 interface (Optional)		
		Alarm I/O	1ch alarm input, 1ch alarm output (Optional)		
		Micro SD	Max. 128G (Optional)		
		Product Features:		Audio&Video encoding	
© 1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR © 2.0 Megapixel, 30fps@1920*1080 © 3.6-10mm(Motorized), 2pcs IR Array LED for 60M, IR ON 0Lux, 140dB TWDR © Support ONVIF Profile S, FTP, RTSP, UPnP etc. © Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. © RJ45, DC 12V, Easy-to-install bracket included © Option: SD card slot, Alarm I/O, Audio I/O, RS485, POE		Video Compression	H.265/H.264/MJPEG		
			H.265 encoding: Main Profile		
			H.264 encoding: High Profile/Main Profile/Baseline		
		Resolution	Main Stream	1920*1080/1280*720; 1~30fps(adjustable)	
			Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
		Video Bitrate	30Kbps~16Mbps, Supports CBR/VBR		
		OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc.		
			OSD location is adjustable		
		Privacy Mask	4 configurable regions		
		Image Orientation	Image Flip and Mirror		
		Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)		
		Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR		
		Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/		
		Audio Compression	G.711A/G.711U/G.726		
		Two Way Audio	Support		
		Application Scenarios:		Data transmission and storage	
Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Data storage	Video and Image		
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)		
		Alarm output	FTP, E-mail		
		Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP		
Order Type:		Wireless protocols(-W)			
DS-HD8632Z-185D		ONVIF Protocols			
		Remote View	PC		
			Mobile Phone		
			User Access		
Outline Dimension:		General Parameters			
		Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable		
		Installation	Ceiling Mounted & Wall Mounted		
		Operating Temperature	-10 °C ~ 50 °C		
		Operating Humidity	0% -85% RH		
		Power	DC12V ±10%(AC 24±10%)		
		POE	Support		
		Power Consumption	<12w(IR ON)		
		Dimension	L310XW100XH70mm		
		Weight	965g		

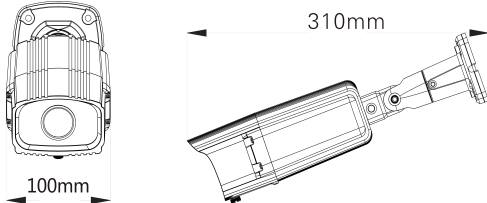

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>