

DS-HD6366Z-178A

6.0MP HD DOME IP CAMERA (H.265)

DOWSE®

Product Picture:



Hardware

SOC		Hi3516A
Image Sensor		1/1.8" Progressive Scan CMOS
Effective Pixels		2592(H)×1944(V)
Interface		
Optical lens	Interfaces	φ 14
	Iris	Fixed Iris
	Focal Length	3.6~10mm(Motorized)
Audio Talkback		1ch MIC external access, 3.5mm AV interface
Audio Output		1ch speaker output, 3.5mm AV interface
Network Port	Lan	10/100M BASE-TX, RJ-45 connector
RS485		1*RS485 interface
Alarm I/O		2ch alarm input, 1ch alarm output
Micro SD		128G

Product Features:

◎ 1/1.8"Progressive Scan CMOS
◎ 6.0 Megapixel, 30fps@2592*1944, 60fps@1920*1080
◎ 3.6-10mm(Motorized), 0.001Lux, 120dB TWDR
◎ Support ONVIF Profile S, FTP, RTSP, UPnP etc.
◎ Support Dual-Stream, Mobile Surveillance, One Push, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc.
◎ Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, Dual SD card slot(128G), RS485、RJ45,DC 12V/AC 24V, POE

Audio&Video encoding

Video Compression	H.264/H.265/MJPEG	
	H.265 encoding: Main Profile	
	H.264 encoding: Baseline Profile/Main Profile	
Resolution	Main Stream	2592*1944/1280*720; 1~60fps(Adjustable)
	Sub Stream	704*576/640*480/640*352/320*240; 1~60fps(Adjustable)
Video Bitrate	30Kbps~16Mbps,Supports CBR/VBR	
OSD Settings	Support channel name, date, and video stream overlay	
	OSD location is adjustable	
Privacy Mask	4 configurable regions	
Image Orientation	Image flip and mirror	
Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Balance (AWB);Auto Gain Control(AGC)	
Image Controls	Saturation, Brightness, Contrast, Sharpness, Hue, Gamma,D-WDR	
Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/LSC	
Audio Compression	G.711A/G.711U/G.726	
Two Way Audio	Support	

Application Scenarios:

Supermarket, hotel, airport, office building etc.

Data transmission and storage


Data storage	Video and Image
Recording	Auto recording and manual recording (motion & sensor detection triggered recording, scheduled Recording)
Alarm output	FTP, E-mail
Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP

Order Type:

DS-HD6366Z-178A	Wireless protocols(-W)	
	ONVIF Protocols	
	Remote View	PROFILE S
		PC
		IE 6.0 above, Firefox, Google etc.
	Mobile Phone	-----

	User Access	Maximum 5 users

Outline Dimension:

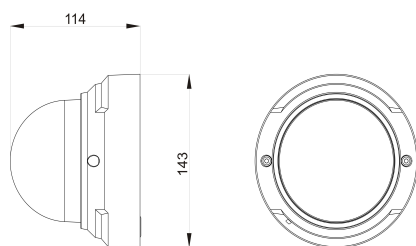

General Parameters

Environmental Casing	Aluminum Alloy Housing, Indoor Applicable
Installation	Ceiling Mounted & Wall Mounted
Operating Temperature	-10 °C ~ 50 °C
Operating Humidity	0% -85% RH
Power	DC12V ±10%(AC 24±10%)
POE	Support
Power Consumption	<3.5W
Dimension	Φ143xH114mm
Weight	655g



深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdownse.com>