


DS-HD6366ZR-178A

6.0MP HD IR DOME IP CAMERA (H.265)

DOWSE®

Product Picture:		Hardware			
		SOC	Hi3516A		
		Image Sensor	1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR		
		Effective Pixels	2592(H)×1944(V)		
		Interface			
		Optical lens	Interfaces	\$ 14	
			Iris	Fixed Iris	
			Focal Length	3.6~10mm(Motorized & One Push)	
		Audio Talkback	1ch MIC external access, 3.5mm AV interface		
		Audio Output	1ch speaker output, 3.5mm AV interface		
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485	1*RS485 interface		
		Alarm I/O	2ch alarm input, 1ch alarm output		
		Micro SD	Max. 128G		
Product Features:		Audio&Video encoding			
© 1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR © 6.0 Megapixel, 30fps@2592*1944, 60fps@1920*1080 © 3.6-10mm(Motorized & One Push), 3pcs IR Array LED for 30M, IR ON 0Lux, 120dB TWDR © Support ONVIF Profile S, FTP, RTSP, UPnP etc. © Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. © Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, SD card slot(Max. 128G), RS485、RJ45, DC 12V/AC 24V, POE		Video Compression	H.265/H.264/MJPEG		
			H.265 encoding: Main Profile		
			H.264 encoding: High Profile/Main Profile/Baseline		
		Resolution	Main Stream	2560*1920/2592*1944/2048*1536, 1~30fps(adjustable); 1920*1080, 1~60fps(adjustable);	
			Sub Stream	704*576/640*480/640*352/320*240; 1~60fps(Adjustable)	
		Video Bitrate	30Kbps~16Mbps, Supports CBR/VBR		
		OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc.		
			OSD location is adjustable		
		Privacy Mask	4 configurable regions		
		Image Orientation	Image Flip and Mirror		
		Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)		
		Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR		
		Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/		
		Audio Compression	G.711A/G.711U/G.726		
		Two Way Audio	Support		
Application Scenarios:		Data transmission and storage			
Supermarket, hotel, airport, office building etc.		Data storage	Video and Image		
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)		
		Alarm output	FTP, E-mail		
		Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP		
Order Type:		Wireless protocols(-W)			
DS-HD6366ZR-178A		ONVIF Protocols	PROFILE S		
		Remote View	PC	IE 6.0 above, Firefox, Google etc.	
			Mobile Phone		
			User Access	Maximum 5 users	
Outline Dimension:		General Parameters			
		Environmental Casing	Aluminum Alloy Housing, Indoor Applicable		
		Installation	Ceiling Mounted & Wall Mounted		
		Operating Temperature	-10 °C ~ 50 °C		
		Operating Humidity	0% -85% RH		
		Power	DC12V ±10%(AC 24±10%)		
		POE	Support		
		Power Consumption	<3.5W, IR ON<9W		
		Dimension	Φ143xH114mm		
		Weight	655g		

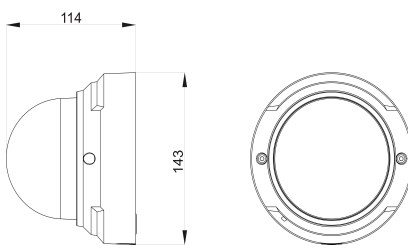

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>