


DS-AI8352Z-385-19A

DOWSE®

Product Picture:		Hardware		
		SOC	Hi3519A	
		Image Sensor	1/1.8" Progressive Scan CMOS	
		Effective Pixels	1920(H)×1080(V)	
		Interface		
		Optical lens	Interfaces	φ 14
			Iris	fixed iris
			Lens type	9-22mm(motorized)
		Audio Talkback	1ch MIC external access, 3.5mm AV interface(Optional)	
		Audio Output	1ch speaker output, 3.5mm AV interface(Optional)	
		Network	Lan	10/100M BASE-TX, RJ-45 connector
		RS485	1*RS485 interface(Optional)	
		Alarm I/O	2ch alarm input, 1ch alarm output(Optional)	
Micro SD	Micro SD, Max 128GB			
Product Features:		Audio&Video encoding		
◎ 1/1.8" SONY Exmor CMOS ◎ 2.0 Megapixel, 30fps@1920*1080 ◎ 9-22(motorized&one push) lens, 2 array led for 60M, IR ON 0Lux,140dB TWDR ◎ Face matching algorithm (supports face capture function, can detect and capture 30 faces at the same time; support front-end face matching, support up to 3 face database management, support import of up to 90,000 faces) ◎ Support protocols: PROFILE S, GB/T28181, FTP/RTSP.UPNP etc. ◎Support three Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ◎ Support RJ45, DC 12V, Bracket integrated design; ◎option: Audio I/O, Alarm I/O,SD slot, RS485, POE		Video Compression	H.264/H.265/MJPEG	
			H.265 Coding type: Main Profile	
			H.264 Coding type: BaseLine Profile / Main Profile	
		Resolution	Main Stream	1920*1080/1280*720 1~60fps(adjustable)
			Sub Stream	704*576/640*480/640*352/320*240 1~60fps(adjustable)
		Video Bitrate	30Kbps~16Mbps(adjustable); Supports CBR/VBR	
		OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable	
		Privacy Mask	4 configurable regions	
		Image Orientation	Image Flip and Mirror	
		Auto Image Control Functio	Auto Exposure Control (AEC); Auto White Blance (AWB); Auto	
		Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-	
		Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/	
Audio Compression	G.711A/G.711U/G.726			
Two Way Audio	Support			
Application Scenarios:		Network features		
This product is widely used in government agencies, intelligent communities, hospitals, roads, transportation, schools, prisons, military management and other places."		Data storage	Video/image	
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output	FTP, E-mail	
		Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、HTTPS、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP	
Order Type:		Wireless protocols(-W)		
DS-AI8352Z-385-19A		ONVIF protocol	PROFILE S	
		Remote View	PC	IE 6.0 above, Firefox, Google etc.
			Mobile Phone	
			User Access	Maximum 5 users
Outline Dimension:		General Parameters		
		Environmental Casing	Aluminum Alloy Housing, Indoor Applicable	
		Installation	Ceiling Mounted & Wall Mounted,	
		Operating Temperature	-10 °C ~ 50 °C	
		Operating Humidity	0% -85% RH	
		Power	DC12V±10% (AC 24±10%)	
		POE	support	
		Power Consumption	<12W	
		Dimension	L310XW100XH70mm	
		Weight	965g	

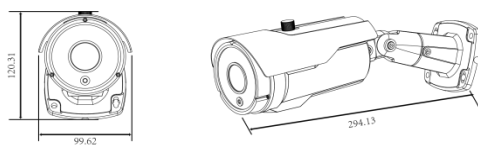

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdwse.com>