


DS-HD8634M-689D

4.0MP HD IR WATERPROOF IP CAMERA

DOWSE®

Product Picture:		Hardware			
		SOC	Hi3516D		
		Image Sensor	1/3" Progressive Scan CMOS		
		Effective Pixels	2592(H)×1520(V)		
		Interface			
		Optical lens	Interfaces	φ 14	
			Iris	Fixed Iris	
			Focal Length	2.8-12mm(Manual)	
		Audio Talkback	1ch MIC external access, 3.5mm AV interface (Optional)		
		Audio Output	1ch speaker output, 3.5mm AV interface (Optional)		
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485	1*RS485 interface (Optional)		
		Alarm I/O	1ch alarm input, 1ch alarm output (Optional)		
		Micro SD	Max. 128G (Optional)		
		Product Features:		Audio&Video encoding	
◎ 1/3" Progressive Scan CMOS ◎ 4.0 Megapixel, 15fps@2592*1520, 15fps@2048*1520, 30fps@1920*1080 ◎ 2.8-12mm(Manual), 2pcs IR Array LED for 60M, IR ON 0Lux, 110dB TWDR ◎ Support ONVIF Profile S, FTP, RTSP, UPnP etc. ◎ Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. ◎ RJ45, DC 12V, Easy-to-install bracket included ◎ Option: SD card slot, Alarm I/O, Audio I/O, RS485, POE		Video Compression	H.265/H.264/MJPEG		
			H.265 encoding: Main Profile		
			H.264 encoding: High Profile/Main Profile/Baseline		
		Resolution	Main Stream	2592*1520/2048*1520/1920*1080; 1~30fps(adjustable)	
			Sub Stream	704*576/640*480/640*352/320*240; 1~30fps(adjustable)	
		Video Bitrate		30Kbps~16Mbps, Supports CBR/VBR	
		OSD Settings		Text overlay supported like title, time, date, week, bitrate and etc. OSD location is adjustable	
		Privacy Mask		4 configurable regions	
		Image Orientation		Image Flip and Mirror	
		Auto Image Control Functions		Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
		Image Controls		Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
		Others		Anti Fogging/Anti Trembling/IR Detection/IRIS/	
		Audio Compression		G.711A/G.711U/G.726	
		Two Way Audio		Support	
Application Scenarios:		Data transmission and storage			
Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Data storage	Video and Image		
		Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)		
		Alarm output	FTP, E-mail		
		Network protocols	TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP		
Order Type:		Wireless protocols(-W)			
DS-HD8634M-689D		ONVIF Protocols		PROFILE S	
		Remote View	PC	IE 6.0 above, Firefox, Google etc.	
			Mobile Phone	-----	
			User Access	Maximum 5 users	
Outline Dimension:		General Parameters			
		Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable		
		Installation	Ceiling Mounted & Wall Mounted, 3D adjustable		
		Operating Temperature	-10 °C ~ 50 °C		
		Operating Humidity	0% -85% RH		
		Power	DC12V ±10%(AC 24±10%)		
		POE	Support		
		Power Consumption	<12w(IR ON)		
		Dimension	L310XW100XH70mm		
		Weight	965g		

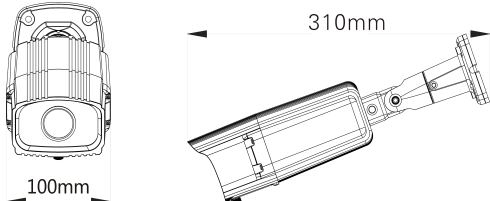

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdownse.com>