

DS-HD6376ZR-178A

6.0MP HD IR DOME IP CAMERA (H.265)

DOWSE®

Product Picture:



Hardware

SOC		Hi3516A
Image Sensor		1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR
Effective Pixels		2592(H)×1944(V)
Interface		
Optical lens	Interfaces	φ 14
	Iris	Fixed Iris
	Focal Length	3.6~10mm(Motorized & One Push)
Audio Talkback		1ch MIC external access, 3.5mm AV interface
Audio Output		1ch speaker output, 3.5mm AV interface
Network Port	Lan	10/100M BASE-TX, RJ-45 connector
RS485		1*RS485 interface
Alarm I/O		2ch alarm input, 1ch alarm output
Micro SD		Max. 128G

Product Features:

© 1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR
© 6.0 Megapixel, 30fps@2592*1944, 60fps@1920*1080
© 3.6-10mm(Motorized & One Push), 3pcs IR Array LED for 30M, IR ON 0Lux, 120dB TWDR
© Support ONVIF Profile S, FTP, RTSP, UPnP etc.
© Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc.
© Built-in MIC, Audio I/O, Dual Alarm In, Single Alarm Out, SD card slot(Max. 128G), RS485, RJ45, DC 12V/AC 24V, POE
© Vandal-proof, Weather-proof, IK10

Audio&Video encoding

Video Compression	H.265/H.264/MJPEG	
	H.265 encoding: Main Profile	
	H.264 encoding: High Profile/Main Profile/Baseline	
Resolution	Main Stream	2560*1920/2592*1944/2048*1536, 1~30fps(adjustable); 1920*1080, 1~60fps(adjustable);
	Sub Stream	704*576/640*480/640*352/320*240; 1~60fps(Adjustable)
Video Bitrate	30Kbps~16Mbps, Supports CBR/VBR	
OSD Settings	Text overlay supported like title, time, date, week, bitrate and etc.	
	OSD location is adjustable	
Privacy Mask	4 configurable regions	
Image Orientation	Image Flip and Mirror	
Auto Image Control Functions	Auto Exposure Control (AEC); Auto White Balance (AWB); Auto Gain Control(AGC)	
Image Controls	Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
Others	Anti Fogging/Anti Trembling/IR Detection/IRIS/	
Audio Compression	G.711A/G.711U/G.726	
Two Way Audio	Support	

Application Scenarios:

Supermarket, hotel, airport, office building etc.


Data transmission and storage

Data storage	Video and Image
Recording	Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)
Alarm output	FTP, E-mail
Network protocols	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP

Order Type:

DS-HD6376ZR-178A	Wireless protocols(-W)		-----
	ONVIF Protocols		PROFILE S
	Remote View	PC	IE 6.0 above, Firefox, Google etc.
		Mobile Phone	-----
	User Access	Maximum 5 users	

Outline Dimension:

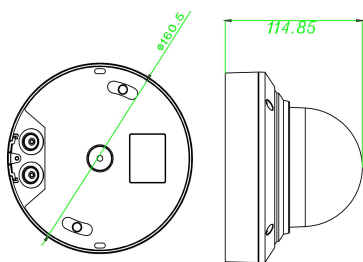

General Parameters

Environmental Casing	Aluminum Alloy Housing, Indoor and Outdoor Applicable
Installation	Ceiling Mounted & Wall Mounted
Operating Temperature	-10 °C ~ 50 °C
Operating Humidity	0% -85% RH
Power	DC12V ±10%(AC 24±10%)
POE	Support
Power Consumption	<3.5W, IR ON<9W
Dimension	Φ161mmxH115mm
Weight	965g



深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdwse.com>