


DS-HD8106M-178A

H.265 6MP IR Bullet IPC

DOWSE®

Product Picture:		Hardware			
		SOC	Hi3516A		
		Image Sensor	1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR		
		Effective Pixels	2592(H)×1944(V)		
		Interface			
		Optical lens	Interfaces	§ 14	
			Iris	Auto Iris	
			Focal Length	3.6-10mm(Manual)	
		Audio Talkback		1ch MIC external access, 3.5mm AV interface (Optional)	
		Audio Output		1ch speaker output, 3.5mm AV interface (Optional)	
		Network Port	Lan	10/100M BASE-TX, RJ-45 connector	
		RS485		1*RS485 interface (Optional)	
		Alarm I/O		1ch alarm input, 1ch alarm output (Optional)	
		Micro SD		Max. 128G (Optional)	
		Product Features:		Audio&Video encoding	
© 1/1.8" SONY EXMOR Progressive Scan CMOS SENSOR © 6.0 Megapixel, 60fps@2592*1944 60fps © 3.6-10mm(Manual), 4pcs IR Array LED for 100M, IR ON 0Lux, 110dB TWDR © Support ONVIF Profile S, FTP, RTSP, UPnP etc. © Support Dual-Stream, Mobile Surveillance, Heartbeat Mechanism, 3D-DNR, Defogging, D-WDR, Lens Correction, Corridor Monitoring etc. © RJ45, DC 12V, Easy-to-install bracket included © Option: SD card slot, Alarm I/O, Audio I/O, RS485		Video Compression	H.265/H.264/MJPEG		
			H.265 encoding: Main Profile		
			H.264 encoding: High Profile/Main Profile/Baseline		
		Resolution	Main Stream	2592*1944/2560*1920/1920*1080 ; 1~60fps(adjustable)	
			Sub Stream	704*576/640*480/320*240; 1~60fps((adjustable)	
		Video Bitrate		30Kbps~16Mbps, Supports CBR/VBR	
		OSD Settings		Text overlay supported like title, time, date, week, bitrate and etc.	
				OSD location is adjustable	
		Privacy Mask		4 configurable regions	
		Image Orientation		Image Flip and Mirror	
		Auto Image Control Functions		Auto Exposure Control (AEC); Auto White Blance (AWB); Auto Gain Control(AGC)	
		Image Controls		Saturation, Brightness, Contrast, Hue, Sharpness, Gamma, D-WDR	
		Others		Anti Fogging/Anti Trembling/IR Detection/IRIS/	
		Audio Compression		G.711A/G.711U/G.726	
		Two Way Audio		Support	
Application Scenarios:		Data transmission and storage			
Government, intelligent community, hospital, road, transportation, school, prison, military district etc.		Data storage		Video and Image	
		Recording		Auto recording and manual recording (motion & sensor alarm recording, scheduled recording)	
		Alarm output		FTP, E-mail	
		Network protocols		TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP	
Order Type:		Wireless protocols(-W)		-----	
DS-HD8106M-178A		ONVIF Protocols		PROFILE S	
		Remote View	PC	IE 6.0 above, Firefox, Google etc.	
			Mobile Phone	-----	
			User Access	Maximum 5 users	
Outline Dimension:		General Parameters			
		Environmental Casing		Aluminum Alloy Housing, Indoor and Outdoor Applicable	
		Installation		Ceiling Mounted & Wall Mounted, 3D adjustable	
		Operating Temperature		-10 °C ~ 50 °C	
		Operating Humidity		0% -85% RH	
		Power		DC12V ±10%	
		POE		-----	
		Power Consumption		<12w(IR ON)	
		Dimension		L350XW115mmXH78mm	
		Weight		1217g	

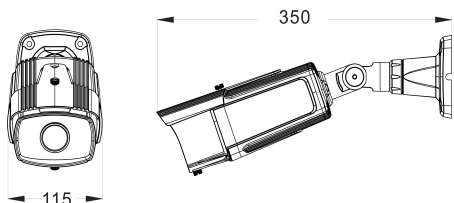

深圳市东视电子有限公司
SHENZHEN DOWSE ELECTRONICS CO.,LTD.

Add: 3-4F, 9Building, Jinxiu Culture Technology Mall, Guanhu AVE, Longhua New District, Shenzhen, China
Tel: +86-755-29500291 Fax: +86-755-29500160
Web: <http://www.szdowse.com>